


Drawn Cup One Way Roller Clutch (Inch Sizes)

RC - One Way Roller Clutch with Integral Plastic Springs

RC..FS - One Way Roller Clutch with Stainless Steel Springs

RCB - One Way Roller Clutch and Bearing Assembly

RCB..FS - One Way Roller Clutch with Stainless Steel Springs

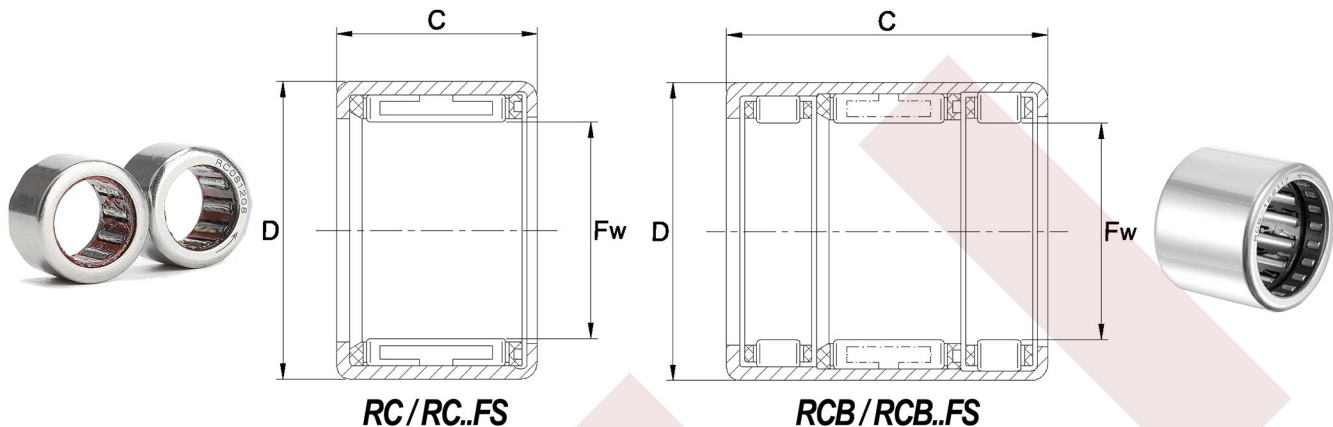

Part Number	Dimension(mm)			Torque Rating(Nm)	Limiting Speed (RPM)	Weight(g)
	Fw	D	C			
RC02	3.175	7.14	6.35	0.323	34000	1
RC040708	6.35	11.13	12.7	2.02	20000	4
RC040708FS	6.35	11.13	12.7	2.02	20000	4
RC061008	9.525	15.875	12.7	5.45	18000	8
RC061008FS	9.525	15.875	12.7	5.45	18000	8
RC081208	12.7	19.05	12.7	8.85	17000	9
RC081208FS	12.7	19.05	12.7	8.85	17000	9
RC101410	15.875	22.225	15.875	16.8	14000	14
RC101410FS	15.875	22.225	15.875	16.8	14000	14
RC121610	19.05	25.4	15.875	23.3	12000	15
RC121610FS	19.05	25.4	15.875	23.3	12000	15
RC162110	25.4	33.35	15.875	49.6	8700	26
RC162110FS	25.4	33.35	15.875	49.6	8700	26

Part Number	Dimension(mm)			Torque Rating(Nm)	Limiting Speed (RPM)	Weight(g)
	Fw	D	C			
RCB061014	9.525	15.875	22.225	5.45	18000	14
RCB061014FS	9.525	15.875	22.225	5.45	18000	14
RCB081214	12.7	19.05	22.225	8.85	17000	16
RCB081214FS	12.7	19.05	22.225	8.85	17000	16
RCB101416	15.875	22.225	25.4	16.8	14000	23
RCB101416FS	15.875	22.225	25.4	16.8	14000	23
RCB121616	19.05	25.4	25.4	23.3	12000	26
RCB121616FS	19.05	25.4	25.4	23.3	12000	26
RCB162117	25.4	33.35	27	49.6	8700	45
RCB162117 FS	25.4	33.35	27	49.6	8700	45

* Note: **RC** = Regular Clutch, **RCB** = Regular Clutch & Bearing Assembly,
No Suffix = Integral Plastic Springs, **FS** = Stainless Steel Springs